

Rimseal Foam Equipment

Angus Rimseal Foam Equipment is used for the protection of vertical open top floating roof (OTFR) storage tanks and comprises two elements - the Rimseal Foam Generator (RFG) which produces expanded foam when supplied with foam solution and the Rimseal Foam Purer (RFP) which delivers the foam gently into the rimseal area.


Available in two basic body sizes (the RFG 50 and RFG 80), with capacities ranging from 54 litres/minute at 4 bar to 684 litres/minute at 10 bar, each unit is factory-calibrated to deliver a specified flow at a given pressure within the limits shown below.

The RFP is a low-profile unit which protects the foam from high winds and guides it gently on to the tank wall. The front shield allows fully developed foam to emerge in a cohesive blanket that flows intact onto the inside wall of the tank. The stainless steel mesh at the foam exit helps to prevent blockage from insects and nesting birds.


For new tanks, the new models can make the most cost-effective use of foam concentrate and water resources by producing the designed foam solution application rate. For retrofit onto existing tanks during refurbishment, the new **Angus RFG** models can replace existing units without the need for expensive modification. Accurate factory-calibration ensures full compatibility with existing foam concentrate induction systems.

To further simplify installation, a fixing kit is now supplied as an optional extra which facilitates installation to the tank whilst still in use and without the need for hot work.


Angus Rimseal Foam Equipment is suitable for use with **Angus** low expansion foam concentrates. For hydrocarbon fuels **Angus FP70, FP70 Plus** or **Petroseal** should be used; but for polar solvent risks **Angus Alcoseal** should be used.

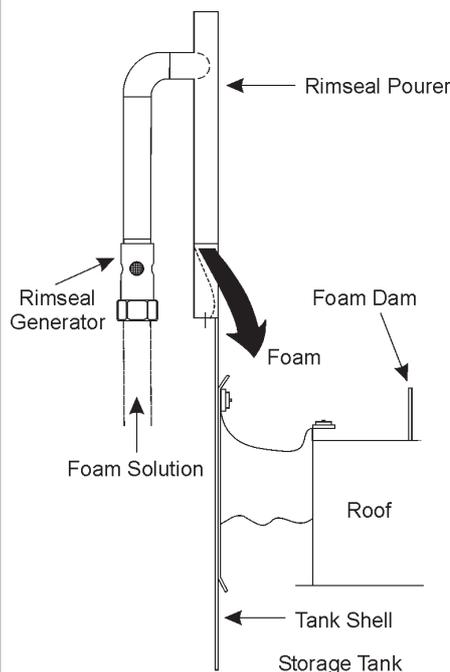


MODEL NO. RFG 50

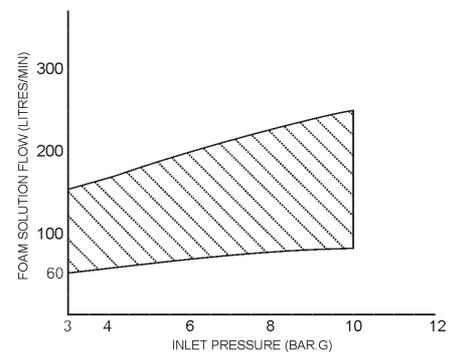

MODEL NO. RFG 80

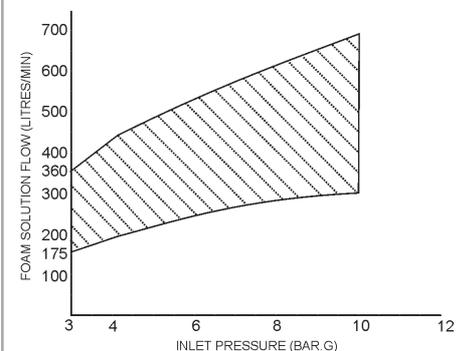

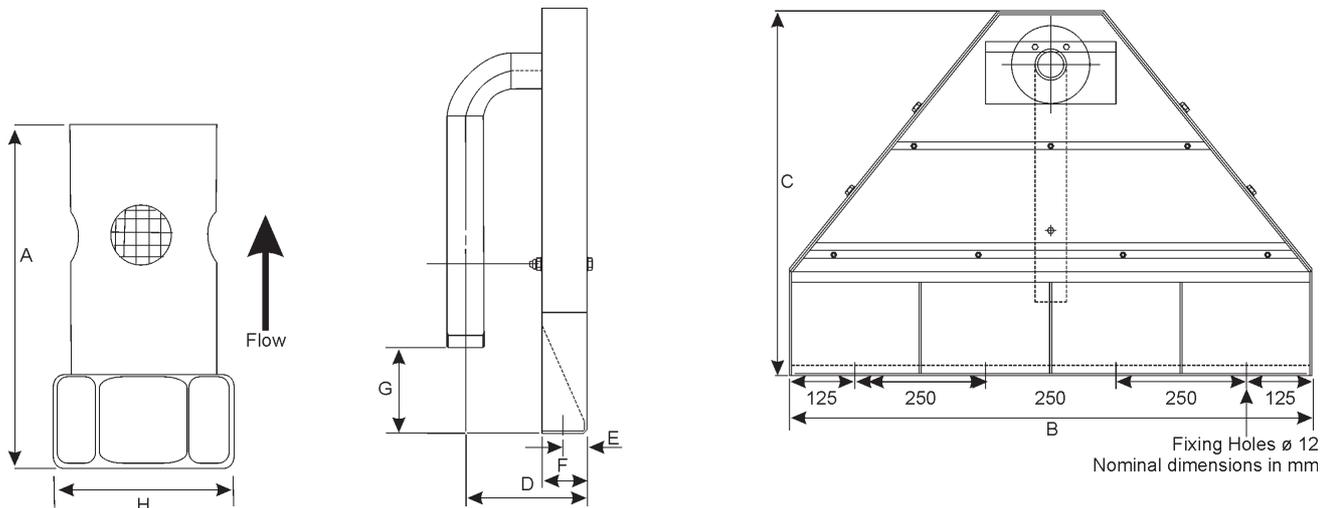

SPECIFICATION DATA

		RFG 50	RFG 80	RFP 50	RFP 80
Dimension	A (mm)	159	236	-	-
	B(mm)	-	-	1000	1000
	C(mm)	-	-	700	700
	D(mm)	-	-	200	240
	E(mm)	-	-	40	40
	F(mm)	-	-	75	75
	G(mm)	-	-	142	102
	H (mm)	75 AF Hex.	105 AF Hex.	-	-
Inlet Connection		2" NPSC (f)	3" NPSC (f)	2" NPT (m)	3" NPT (m)
Outlet Connection		2" NPSC (f)	3" NPSC (f)	-	-
Materials Body		Cast Iron to BS 2789 Grade 420/12		-	-
	Internal Fitting	Stainless Steel to BS 970 316S31		-	-
	Deflector	-	-	Carbon Steel	
	Internal Mesh	-	-	Stainless Steel	
	Pipe	-	-	Steel tube to BS 1387	
	Optional Clamps	-	-	Clamp: Malleable iron, natural finish Bolt: Steel, zinc plated	
Finish		Yellow Thermoplastic Powder Coated			
Approx Weight (Kg)		3.5	6.5	37	41
To Install	Fixing Holes	-	-	4 x 12mm dia. holes	
	Optional Clamps	-	-	Min. 2 clamps per pourer	

OPERATING DATA

Operating Pressure	3 bar to 10 bar
Typical Foam Expansion	4:1 to 8:1
Typical 25% Drainage Time	1.5 to 3 minutes using Angus FP70 Foam Concentrate